



4.0 A Single-Phase Silicon Bridge Rectifier Rectifier Reverse Voltage 50 to 1000V

FIG.1-MAXIMUM FORWARD SURNGE CURRENT

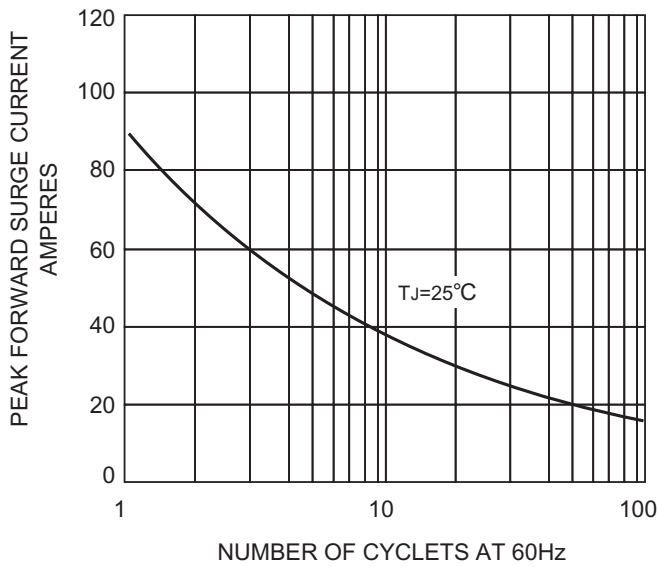


FIG.2-FORWARD CURRENT DERATING CURVE

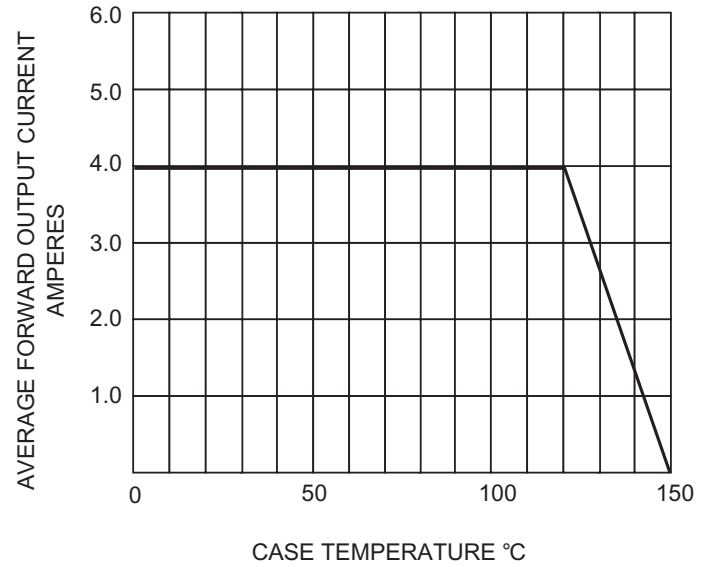


FIG.3-TYPICAL FORWARD CHARACTERISTICS



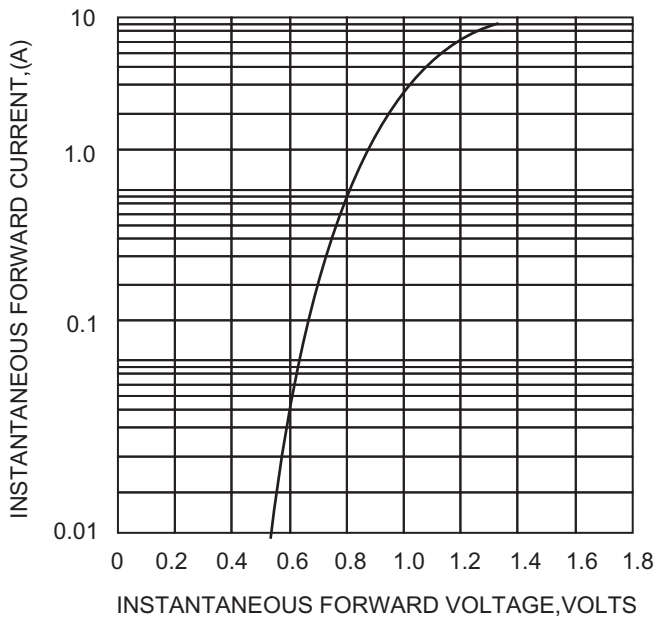


FIG.4 -TYPICAL REVERSE CHARACTERISTICS



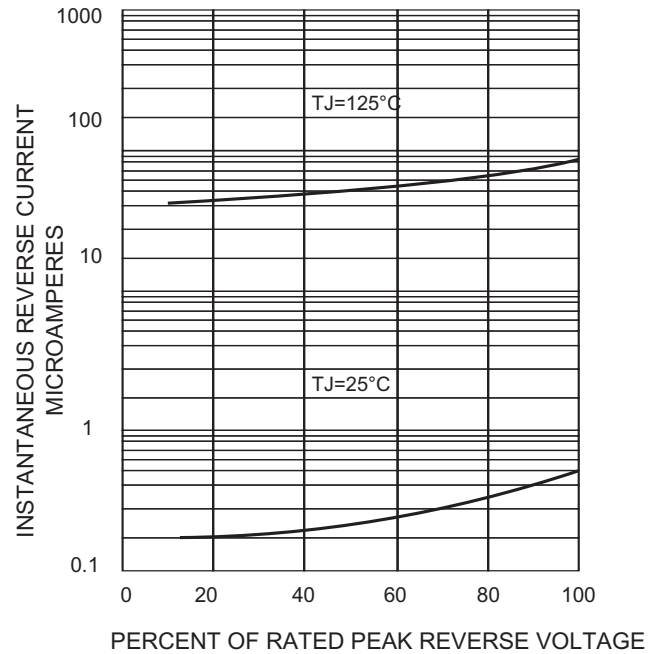


MARKING INFORMATION




XXXX = Date Code Marking
MSB410 = Marking Code

PACKING REQUIRMENTS

- PS black anti-static carrier tape packing.

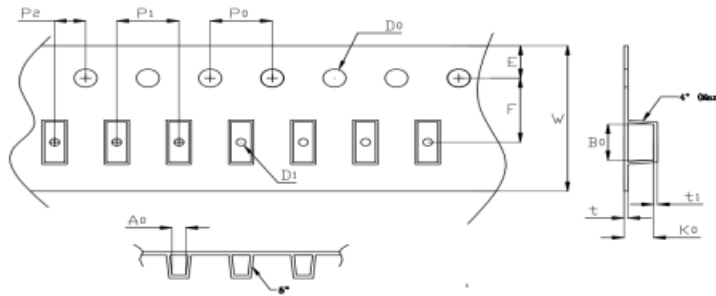

Specifications	Carrier tape type	A ₀	B ₀	K ₀	P ₀	W	t ₁	Explain
MSB	Anti-static	7.0±0.10	8.7±0.10	1.65±0.10	4.00±0.10	16.0±0.30	0.28±0.05	

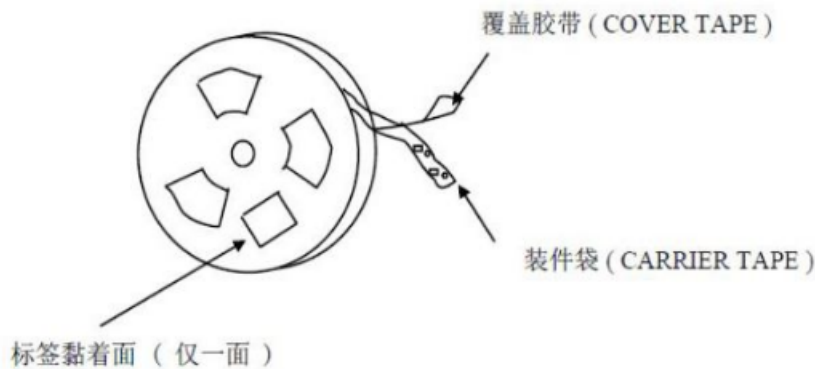

DEVICE TYPE	Tape width	13" Reel		
		Q'TY/REEL (pcs)	BOX/CARTOON	Q'TY/REEL (pcs)
MSB	16mm	3000	6000	60000